


## STYLE#: 21348

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

## Carefully unpack all lamp parts from carton. We suggest a licensed electrician for all fixture installations.

- 1. Take the lamp carefully out of the Carton, and place on a flat surface.
- 2. Be sure power to the installation point is OFF. Follow the steps below for assembly.
- 3. Adjust the length of wire needed for your installation, remove excess. Determine the number of Rods to be assembled to the **Fixture Body** as needed for your hanging height. Pull the Supply Wire with Ground Wire through the selected **Rods** and **Swivel**. Thread the **Rods** & connect **Part** A. Hand tighten.
- 4. Pass the supply wire through the **Universal Bar** assembly, secure the **Universal Bar** to the Outlet Box with Outlet Box Screws.
- **5**. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire. Connect the wires as shown.
  - A.Connect the House Ground Wire to the Fixture Ground Wire.
  - B.Connect the House White (or Ribbed) Wire to the Fixture Supply Wire (White or Ribbed Side).
  - C.Connect the House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth Side).
  - D.Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.
- 6. Fasten the Universal Bar to the Canopy. Thread Mounting Screws to secure it. Tighten until snug with screwdriver
- 7. Place the **Nipple** of the **Socket Assembly** into the Holes of **Metal Frame** and secure with **Part A**. Then use **Part B** screw **Part A** until snug.
- **8**. Install the correct **Bulb**(Bulb Included) into the **Socket** until snug.

Your installation is completed now. Restore electricity.

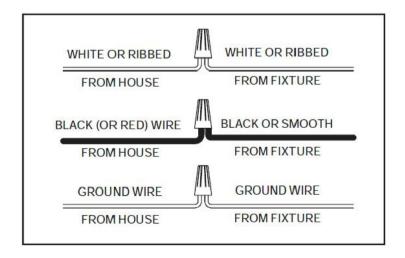

## UTTERMOST ASSEMBLY INSTRUCTIONS

STYLE#: 21348

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

