

UNO Wall Sconce

3-500-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-18 Gunmetal



-24 Satin Nickel




-40 Aged Brass



With optional backplate

- LIGHT SOURCE** 1 x 7W Max LED GU10 Base (Lamp not included)
- LUMINAIRE POWER** 7.08W at 120V
- RATED LIFE** See LED lamp manufacturer specification
- LUMEN OUTPUT** Delivered: 258 lm (LM-79)**
- INPUT VOLTAGE** 120V
- DRIVER OUTPUT** N/A
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER** - Frosted Glass
- FINISHES** Gunmetal (-18), Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 2" x 3" J-Box, 4" Octagonal J-Box*, 4" Square J-Box with a single device mud ring
*Backplate required to cover J-Box
- STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

**Lumen Output may vary based on the lamp that is used

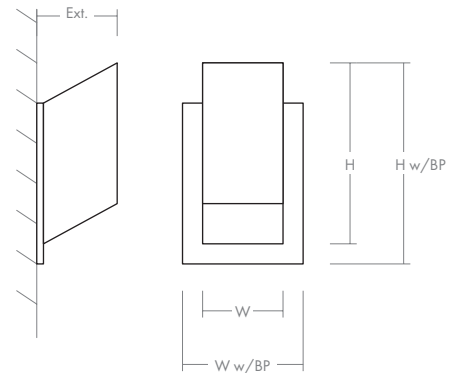

DIMENSIONS

- W:** 3.00"
- H:** 6.75"
- Ext:** 3.00"
- M.C:** 4.20" From top of fixture

With optional backplate

- W:** 4.75"
- H:** 7.66"
- Ext:** 3.125"
- M.C:** 4.20" From top of fixture

Order example for standard fixture:
3-500-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V

