

ORACLE Wall Sconce / Ceiling Mount
3-620-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass



-14 Polished Chrome



-15 Black





-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	24.1W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1952 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	700mA, 29.4W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Black (-15), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

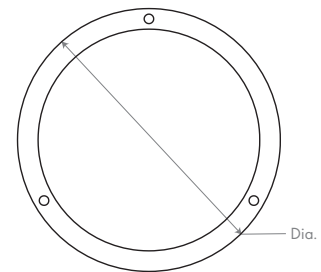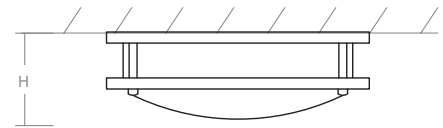

DIMENSIONS

Dia: 17.75"

H: 4.25"

Order example for standard fixture:

3-620-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-620-2722**

27: 2700K, **35:** 3500K, **40:** 4000K

