

# MAGNUM Pendant

120v : **3-653-xxx**

277v : **37-653-xxx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-24 Satin Nickel



-14 Polished Chrome



-25 Satin Copper



-40 Aged Brass

### Diffusers:



-1 White Opal Glass



- Matte White Acrylic

**LIGHT SOURCE** 1 x 5.12W LED, 3000K, CRI 90

**LUMINAIRE POWER** 6.62W at 120V

**RATED LIFE** 60000 hr RL

**OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K

**LUMEN OUTPUT** Delivered: (-1) Glass: 416 lm (LM-79)  
Acrylic: 383 lm (LM-79)

**INPUT VOLTAGE** 120V or 277V

**DRIVER OUTPUT** 150mA, 6W

**DIMMING** 0-10v & Phase (ELV) Dimming - 50/60hz 100%  
to 10% Dimming

**CONSTRUCTION** Plated Steel and Acrylic /or Glass

### METAL FINISH / DIFFUSER

(-114) White Opal Glass / Polished Chrome  
(-124) White Opal Glass / Satin Nickel  
(-125) White Opal Glass / Satin Copper  
(-140) White Opal Glass / Aged Brass  
(-14) Matte White Acrylic / Polished Chrome  
(-24) Matte White Acrylic / Satin Nickel  
(-25) Matte White Acrylic / Satin Copper  
(-40) Matte White Acrylic / Aged Brass

**MOUNTING** 4" Octagonal J-Box, 2" x 3" J-Box

**STANDARDS** ETL Dry/Damp listed, Conforms to UL STD 1598, Certified  
CAN/CSA, STD C22.2 No 250.0.


Order example for standard fixture:

**3-653-124** (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-653-27124**

27: 2700K, 35: 3500K, 40: 4000K

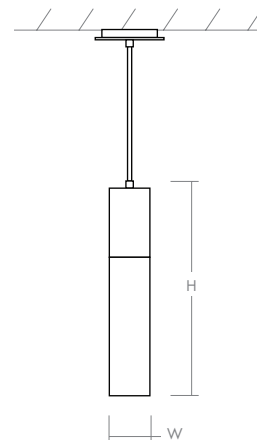

### DIMENSIONS

**Dia. Canopy:** 5.88"

**Dia Fixture:** 3.50"

**H. Fixture:** 18.62"

Supplied with 8 ft braided cord

