

# OPUS Pendant

## 3-654-xxx

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-14 Polished Chrome



-24 Satin Nickel



-25 Satin Copper



-40 Aged Brass

**Diffusers:**




-1 White Opal Glass



- Matte White Acrylic

<b>LIGHT SOURCE</b>	1 x 6.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	7.2W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: (-1) Glass: 412 lm (LM-79) Acrylic: 399 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	180mA, 7.6W max power
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
<b>CONSTRUCTION</b>	Plated Steel and Acrylic or Glass
<b>DIFFUSER/ METAL FINISHES</b>	(-114) White Opal Glass/Polished Chrome (-124) White Opal Glass/Satin Nickel (-125) White Opal Glass/Satin Copper (-140) White Opal Glass/Aged Brass (-14) Matte White Acrylic/Polished Chrome (-24) Matte White Acrylic/Satin Nickel (-25) Matte White Acrylic/Satin Copper (-40) Matte White Acrylic/Aged Brass
<b>MOUNTING</b>	4" Octagonal J-Box *, 4" Square J-Box * with a single device mud ring * Deep J-Box (Required to house driver)
<b>STANDARDS</b>	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

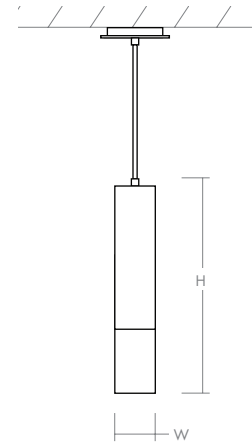

**DIMENSIONS**

**Dia. Canopy:** 5.88"  
**Dia. Fixture:** 3.50"  
**H. Fixture:** 18.00"  
 Supplied with 10 ft braided cord

Order example for standard fixture:

**3-654-124** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120V to 277V

Order example for optional color temperatures: **3-654-27124**

**27:** 2700K, **35:** 3500K, **40:** 4000K

