

**LUNA Pendant**  
**3-672-xx**


oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-24 Satin Nickel                      -20 Polished Nickel                      -22 Oiled Bronze                      -40 Aged Brass

- LIGHT SOURCE**      1 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER**    12.4W at 120V
- RATED LIFE**            60000 hr RL
- OPTIONAL COLOR TEMPERATURES**    2700K, 3500K, 4000K
- LUMEN OUTPUT**        Delivered: 714 lm (LM-79)
- INPUT VOLTAGE**        120V to 277V AC, 50/60Hz
- DRIVER OUTPUT**        350mA, 14.7W max power
- DIMMING**                TRIAC and ELV dimming at 120V AC;  
0-10V dimming, 100% to 1% current output
- CONSTRUCTION**        Plated Steel and Glass
- DIFFUSER**                - White Opal Glass
- FINISHES**                 Polished Nickel (-20), Oiled Bronze (-22),  
Satin Nickel (-24), Aged Brass (-40)
- MOUNTING**               4" Octagonal J-Box\*,  
4" Square J-Box\* with a single device mud ring  
\* Deep J-Box (Required to house driver)
- STANDARDS**              UL Dry/Damp listed, Conforms to UL STD 1598,  
Certified CAN/CSA STD C22.2 No 250.0.

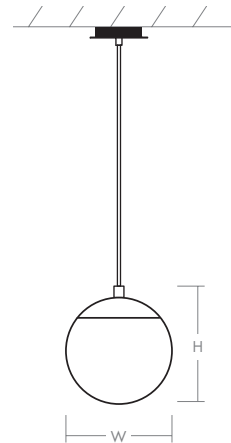

**DIMENSIONS**  
**Dia. Canopy: 5.88"**  
**W. Fixture: 10.00"**  
**H. Fixture: 13.00"**  
**Supplied with 10 ft braided cord**

Order example for standard fixture:  
**3-672-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V to 277V  
Order example for optional color temperatures: **3-672-2724**  
27: 2700K, 35: 3500K, 40: 4000K

