

### FEATURED MODEL

441467 Super Single, 9-1/2" bowl depth, CINDER

### ADDITIONAL MODELS

- 440192 Super Single, 9-1/2" bowl depth, CAFE BROWN
- 440193 Super Single, 9-1/2" bowl depth, METALLIC GRAY
- 440194 Super Single, 9-1/2" bowl depth, ANTHRACITE
- 440195 Super Single, 9-1/2" bowl depth, WHITE
- 440196 Super Single, 9-1/2" bowl depth, BISCUIT
- 441214 Super Single, 9-1/2" bowl depth, BISCOTTI
- 441287 Super Single, 9-1/2" bowl depth, TRUFFLE

**Versatile dual deck design can be installed as a drop-in or undermount.**

### FEATURES

- Required outside cabinet: 33" (drop-in), 36" (undermount)
- 80% solid granite
- Heat resistant up to 536°F
- Unsurpassed cleanability backed by industry leading 7 patents!
- Resistant to scratches, stains and all household acids and alkali solutions
- Template provided
- Undermount clips NOT included
- 1/2" deck thickness
- Limited lifetime warranty

### OPTIONAL ACCESSORIES

- Sink Grid: 221010
- Cutting Board: 440230 (drop-in only)

### CODE/STANDARDS COMPLIANCE

ANSI Z124.6-97  
 IAPMO/UPC listed

### WARRANTY

BLANCO'S SILGRANIT II Series sinks feature a LIMITED LIFETIME WARRANTY to be free of all manufacturing defects under normal use. See our complete warranty for details.

While BLANCO endeavors to provide accurate information, all dimensions are nominal, cannot be guaranteed, and are subject to change or cancellation. BLANCO assumes no responsibility for use of superseded or voided specifications.

### JOB INFORMATION

Job Name: \_\_\_\_\_

Contact: \_\_\_\_\_

Date Specified: \_\_\_\_\_

Specifier: \_\_\_\_\_

Contractor: \_\_\_\_\_





Model 440194 shown

### NOMINAL DIMENSIONS


OVERALL	CUTOUT SIZE	BOWL DEPTH	DRAIN DIAMETER
33-1/2" x 22"	Refer to supplied template.	9-1/2"	3-1/2"

DXF cutout templates (Undermount and Drop-In versions) available on our website

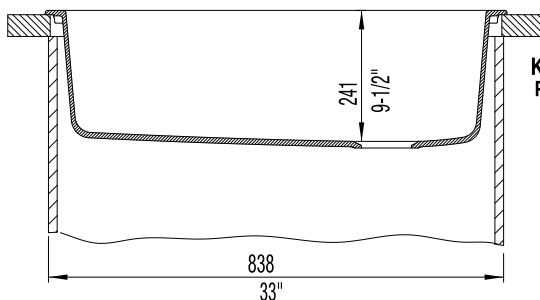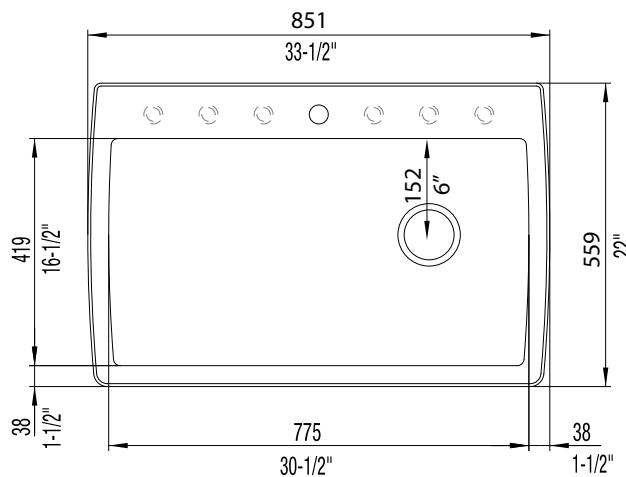

### KNOCKOUT HOLE LOCATIONS

Pre-drilled for single-hole faucet.



### BLANCO AMERICA

800.451.5782  
 www.blancoamerica.com

© 2013 BLANCO AMERICA  
 6/13

SPEC-003