


Submitted Model No.: _____

Specific Features: _____

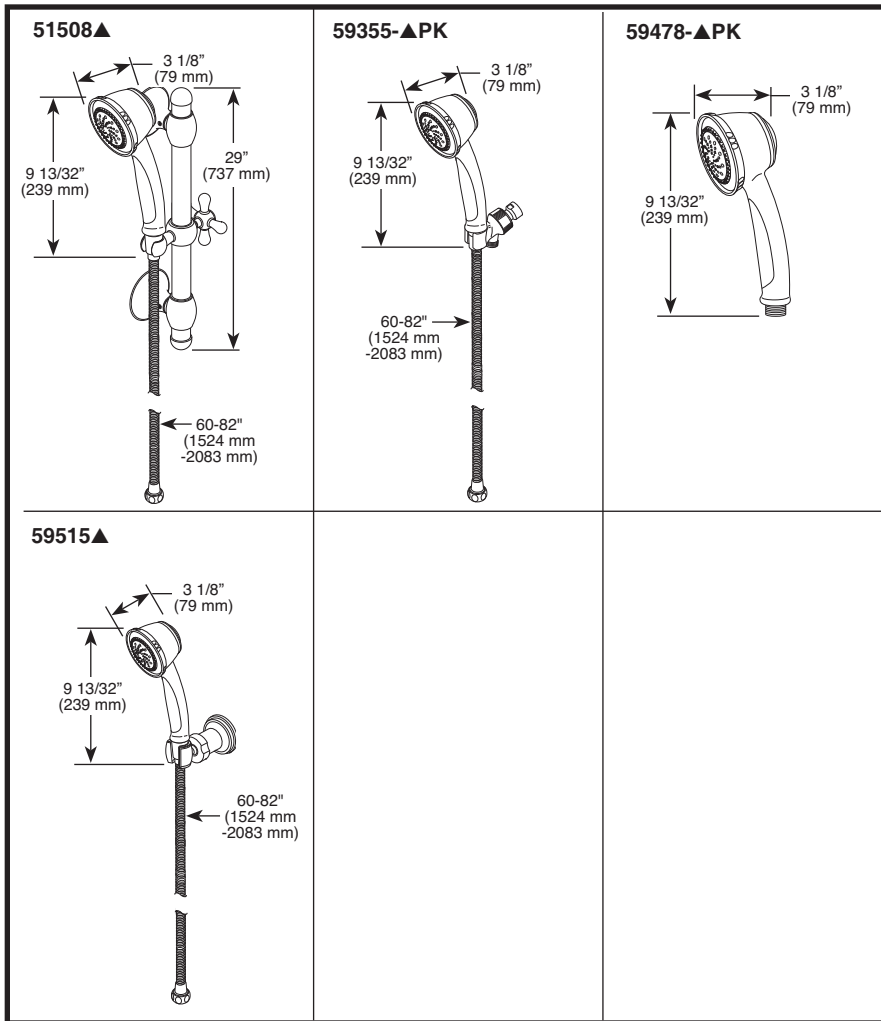

▲ Designate proper finish suffix

◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.



PERSONAL HAND HELD SHOWERS

- Five Spray Handshower
- Touch-Clean® Nozzles

STANDARD SPECIFICATIONS:

- Five spray handshower.
- 60-82" Stretchable metal hose.
- Moveable face plate switches between spray patterns.
- Traditional slide bar. Suggest 23 3/4" on center: 51508.
- Adjustable wall mount: 59515.
- Shower arm mount: 59355-▲PK.
- Maximum 2.50 gpm @ 80 psi, 9.5 L/min @ 550 kPa


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1/CSA B125.1◆

Spray Patterns

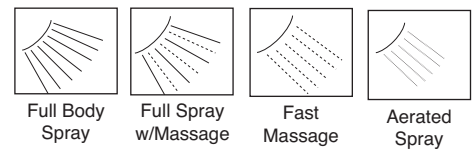

Pause



55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
 © 2015 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-51508 Rev. D