

CRYST RAMA



1958


95 Cantiague Rock Road, Westbury NY 11590

ph: 516.931.9090 fax: 516.931.1254


info@crystoram.com . www.crystorama.com

MODEL#: 5972-SL
ASSEMBLY AND DRESSING INSTRUCTIONS

WARNING:




Electrical Danger






Turn Power Off


All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

You will need 2-cand. Bulb
 60 Watts Recommended
 (Bulb not included)

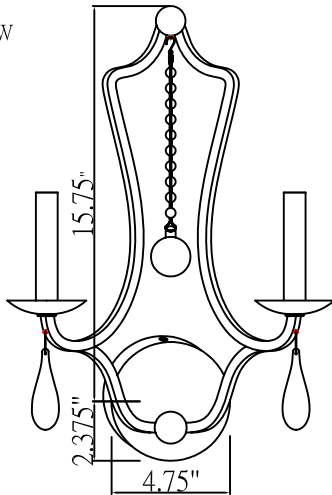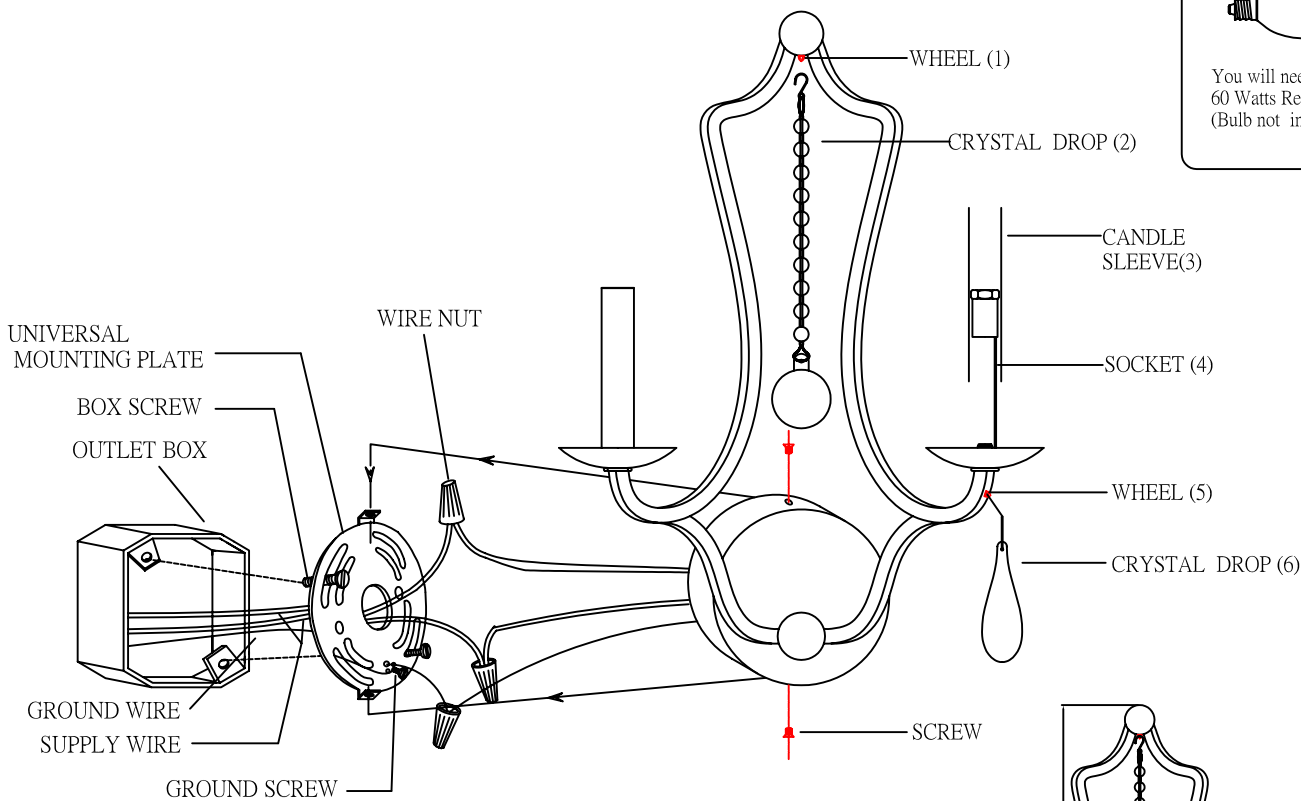

CRYSTAL DROP (6) =  (1 X 27*82mm drop)*2pcs

CRYSTAL DROP (2) =  (10 X 10mm+1 X 40mm drop)*1pc

FIXTURE ASSEMBLY, MOUNTING, AND WIRING INSTRUCTIONS:

- 1: Carefully remove the fixture out of the carton and check that all parts are included, referring to the above illustration. Make sure that the electricity is turned off.
- 2: Thread 2 Mounting screws properly into the relevant mounting holes pre-drilled on the Mounting plate;
- 3: Attach the mounting plate to outlet box using 2 Outlet box screws upwards;
- 4: Make wire connections:
 - Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.
- 5: Tuck the wire connection neatly into the outlet box;
- 6: Place the back plate over the outlet box and let 2 mounting screws protrude through the mounting holes on the back plate well; then lock it in place by ball nuts;
- 7: Turn power on at fuse or circuit box.
- 8: Install the candle sleeve(3) onto socket(4), and install the crystal drop(2) onto wheel (1), crystal drop(6) onto wheel(5).
- 9: The fixture is ready for lamping and installation!