

# INSTALLATION INSTRUCTIONS

Model #72696

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker box and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Pull the black, white and ground wires out of base of the post (A).



## CONNECTING THE WIRES (Fig. 2)

4. While supporting the fixture, connect the electrical wires as shown in Fig. 2. If your post has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding (Fig.2). After wires are connected, tuck them carefully inside the post cup (A) (not included).

## COMPLETING THE INSTALLATION (Fig. 1)

5. Align the lantern (D) with post (A) and secure with screws (B).
6. At this point, unscrew screws (C) and remove cage (F).
7. Install (4) four type B bulbs up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Replace the glass shade (E) followed by cage (F) and secure with screws(C).

Your installation is now complete. Return power and test the fixture.

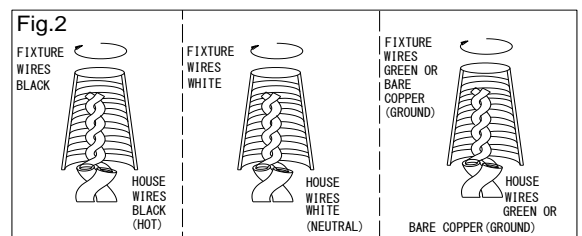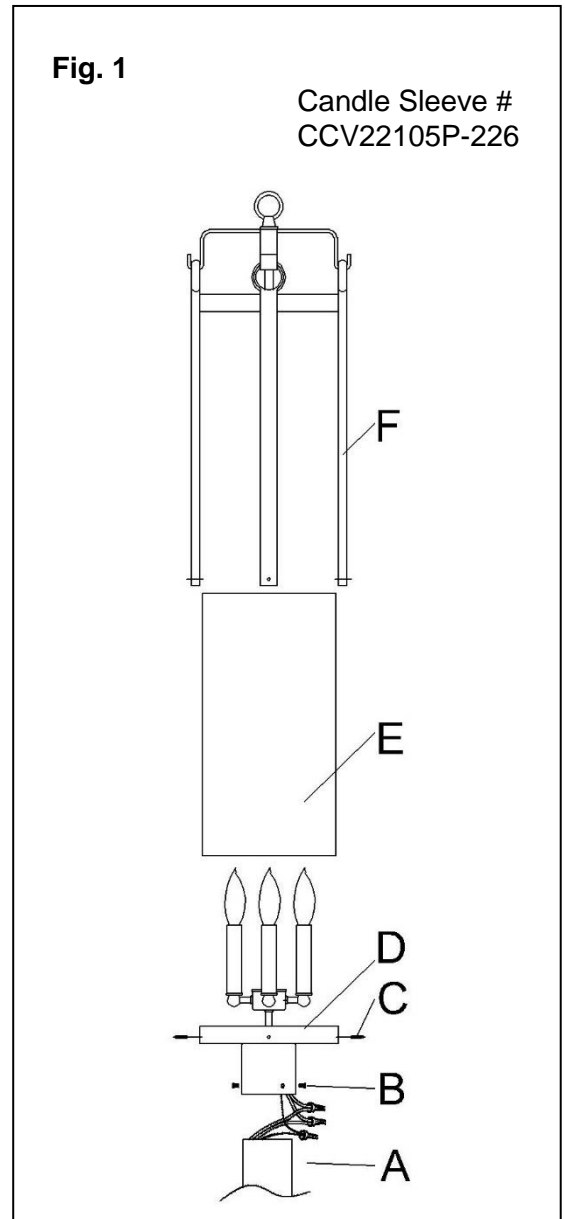

**“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”**

**ATTENTION – RISQUE D’INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.**

