

TOTO®

CST494CEMF(R)(G)

Connelly™ Close Coupled Toilet, 1.28GPF & 0.9GPF

FEATURES

- Dual-Max® Cyclone® flushing system, high efficiency (1.28GPF/4.8LPF & 0.9GPF/3.4LPF)
- Dual flush function
- Elongated bowl
- Universal Height
- Close coupled bowl and tank set, less toilet seat
- SanaGloss® ceramic glaze minimizes debris, mold and bacteria from sticking to porous, ceramic surfaces
- Chrome trip-lever
- 12" Rough-in

MODELS

- CST494CEMFG
With SanaGloss ceramic glaze (#01, #03, #11, #12)
- CST494CEMFRG
Same as above with right-hand trip lever (#01)
- CST494CEMF
Without SanaGloss ceramic glaze (#51)

COMPONENTS

- CT494CEFG - Elongated Front Bowl SanaGloss
- CT494CEF - Elongated Front Bowl Less SanaGloss
- ST494M - Tank and cover only
- ST494MR - Same as above with right-hand trip lever
- SS224 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)
- SS304 SoftClose® maple seat (sold separately)

COLORS/FINISHES

- #01 Cotton #03 Bone
- #11 Colonial White #12 Sedona Beige

- #51 Ebony (not available in SanaGloss)

PRODUCT SPECIFICATION

The two-piece, universal height, high efficiency Dual-Max Cyclone flushing system toilet shall be 1.28GPF/0.9GPF. Toilet shall be ADA height compliant and universal height. Toilet shall have high-profile tank, elongated front bowl and chrome trip-lever. Toilet shall be **TOTO Model CST494CEMF__**.



DUALMAX® FLUSHING SYSTEM BY TOTO *SanaGloss*
CYCLONE® FLUSHING SYSTEM BY TOTO

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



CST494CEMF(R)(G)

Connelly™ Close Coupled Toilet, 1.28GPF & 0.9GPF



SPECIFICATIONS

- Water Use 1.28 GPF & 0.9GPF (4.8LPF & 3.4LPF)
- Flush System Dual-Max Cyclone
- Min. Water Pressure 8 psi (flowing)
- Water Surface 5-1/2" x 4-3/16"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C494CEF(G) - 70lbs
ST494M(R) - 31lbs
- Shipping Dimensions C494CEF(G)
29" L x 18" W x 15-3/4" H

ST494M(R)
17-1/4" L x 8-1/2" W
x 16-1/4" H

INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

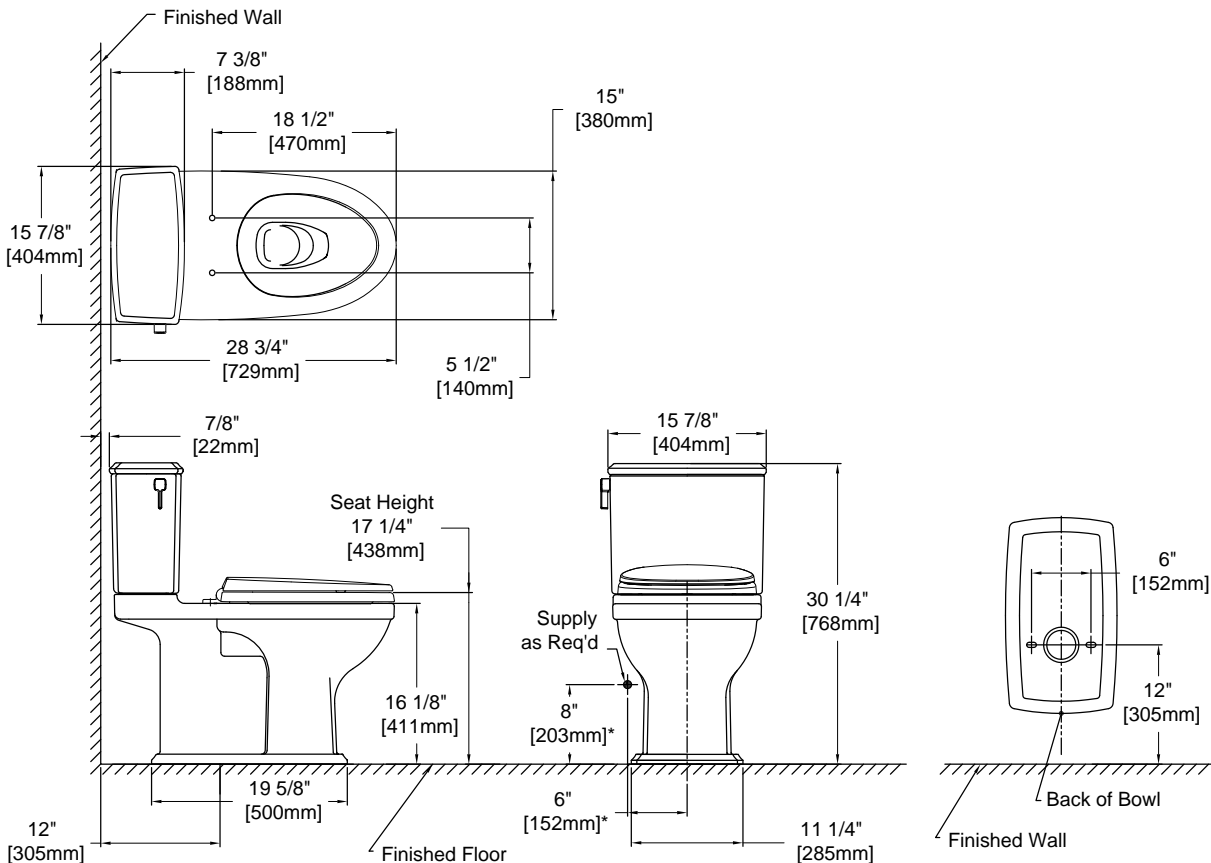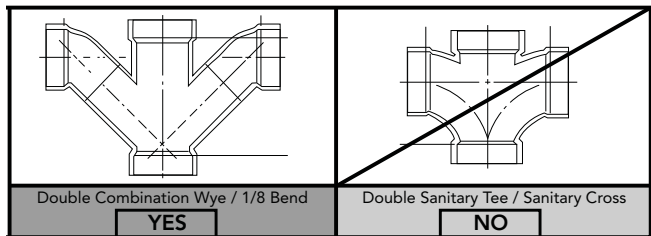

TOTO®

These dimensions and specifications are subject to change without notice