
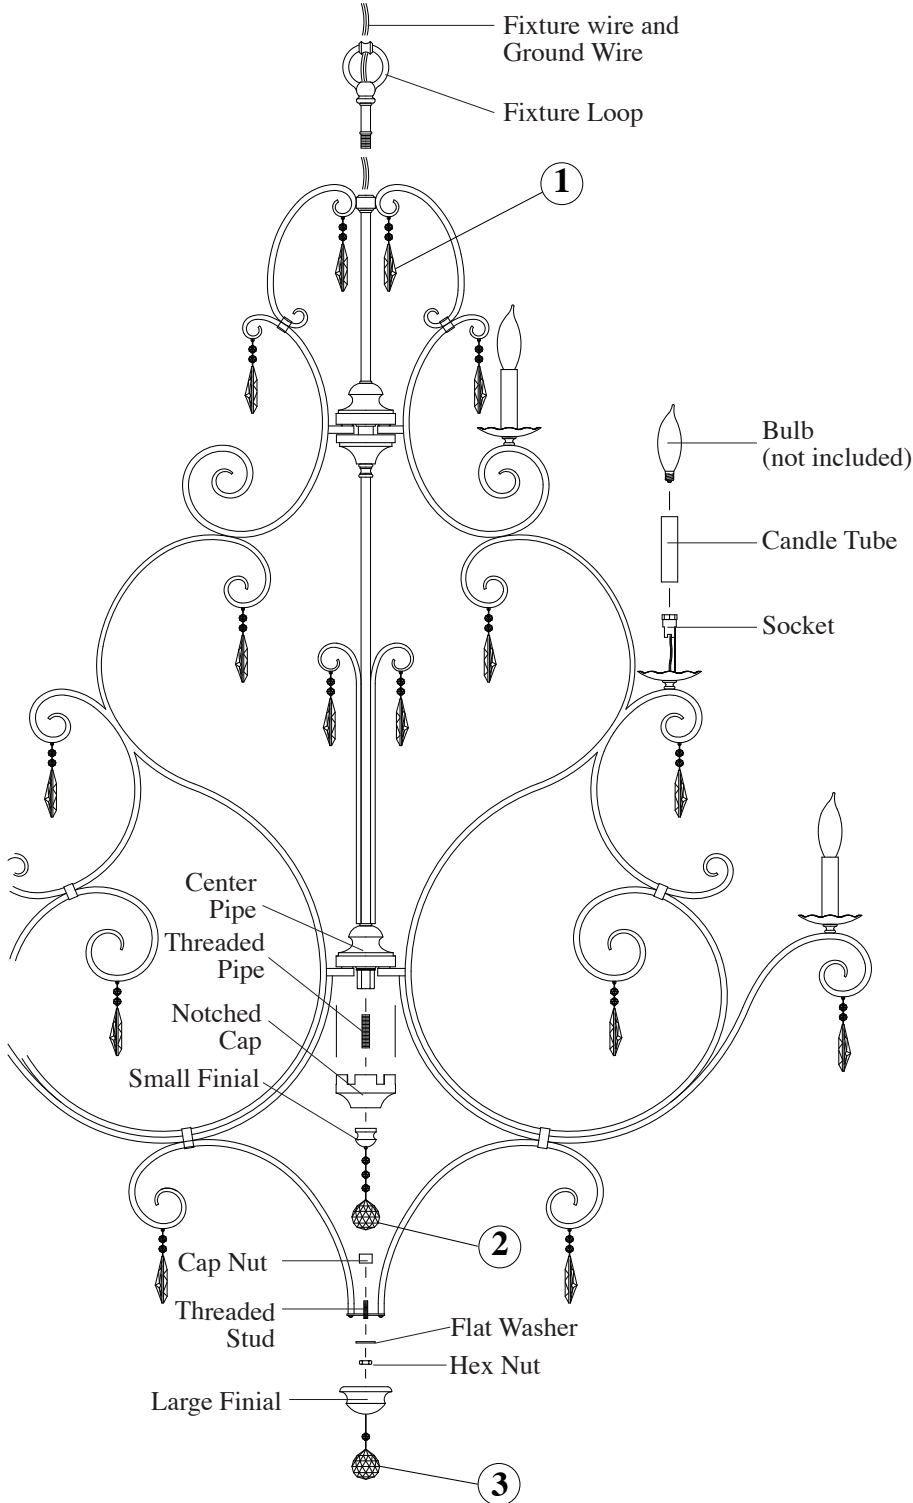


NOTE: Spare crystals enclosed in hardware bags.

(56) PC. (1) PC. (1) PC.

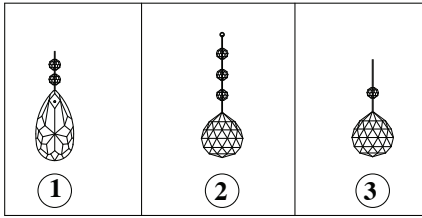

IMPORTANT:
TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION.

Carefully unpack and identify all parts before assembly. Bulb not included.

1. **A.** Spread open arms so they are evenly spaced to each other.
B. Screw threaded pipe into coupler located at bottom section of center body. Then slip notched cap in order to lock arms into position. Fasten with small finial.
2. Install fixture loop by screwing onto top of fixture.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
4. Install threaded stud into cap nut. Then slip the threaded stud from above through round plate. Lock them into position by fastening with a lock washer and hex nut from below. Install large finial by screwing onto the protruding threaded stud.
5. Slip candle tube over sockets.
6. Install bulbs (not included). See relamping label located near socket area for type and maximum allowed wattage.
7. Hang all crystal glass parts as shown on drawing. NOTE: To replace broken crystals extras are included in hardware bag. Replace by gently bending open pin, remove broken crystal, hook new one, then close back pin. Avoid bending pin into sharp angle.