

Lismore 9 Light Chandelier

F2937/3+6

1.3

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for dry locations only.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

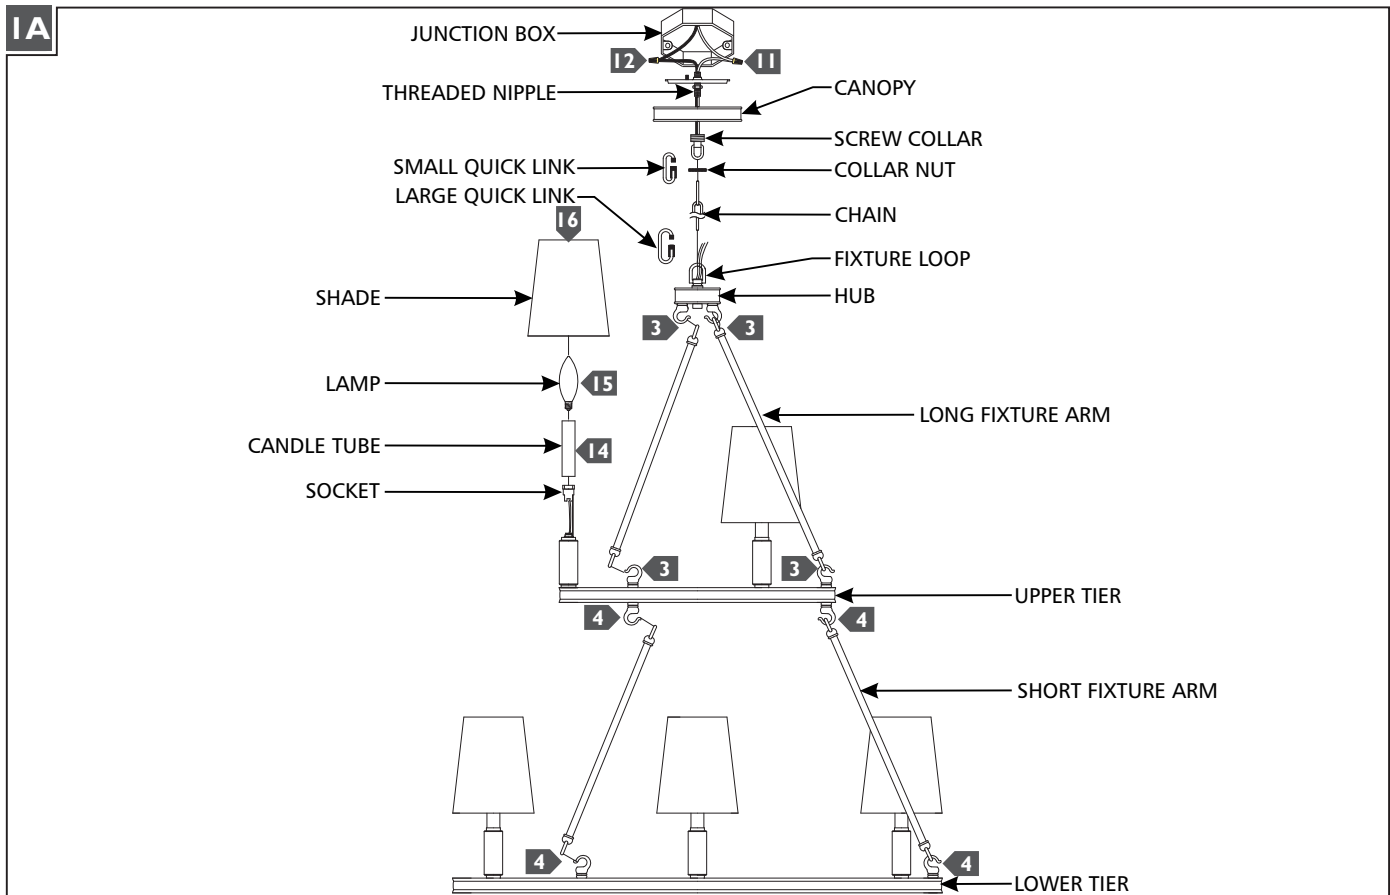

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Using the help of another person, connect the upper tier of the chandelier to the hub by hooking each of the long fixture arms into the corresponding hook.
- 4** Using the help of another person, connect the lower tier of the chandelier to the upper tier by hooking each of the short fixture arms into the corresponding hook.
- 5** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 6** Install the large quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 7** Unscrew the collar nut from the screw collar, then install the collar nut, and the canopy onto the chain (in that order).
- 8** Install the small quick link onto the remaining end of the chain, then secure the quick link onto the screw collar.
- 9** Weave the cord through the chain, collar nut, canopy, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 10** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut onto the screw collar.
- 14** Install the candle tubes by sliding them over the socket.
- 15** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 16** Install the shades by placing them over the lamps.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2018 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.