

Please go to [www. quoizel. com](http://www. quoizel. com) for product cleaning tips. Go to the **Care + Maintenance** selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (8) A19 Medium Base Bulbs 100W Maximum

**Estimated Assembly Time:** 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### **⚠ Warnings and Cautions**

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.


### **⚠ Care of Tiffany Style Shade**

A new tiffany lamp shade has an oil film applied to the shade that protects the tiffany shade from scratches during shipment. If the oil applied is too heavy you can remove the excess oil film with a paper towel. Gently wipe away the excess oil.


For general cleaning of tiffany shades use a gentle lemon oil-based furniture polish applied to a soft cloth and wipe gently.

If a white powder appears on the soldered joints of the tiffany shade this is a normal oxidation process. Use a small amount of lemon oil or mineral oil applied directly to oxidized areas and the soldered area will return to like new.

### **Package Contents**

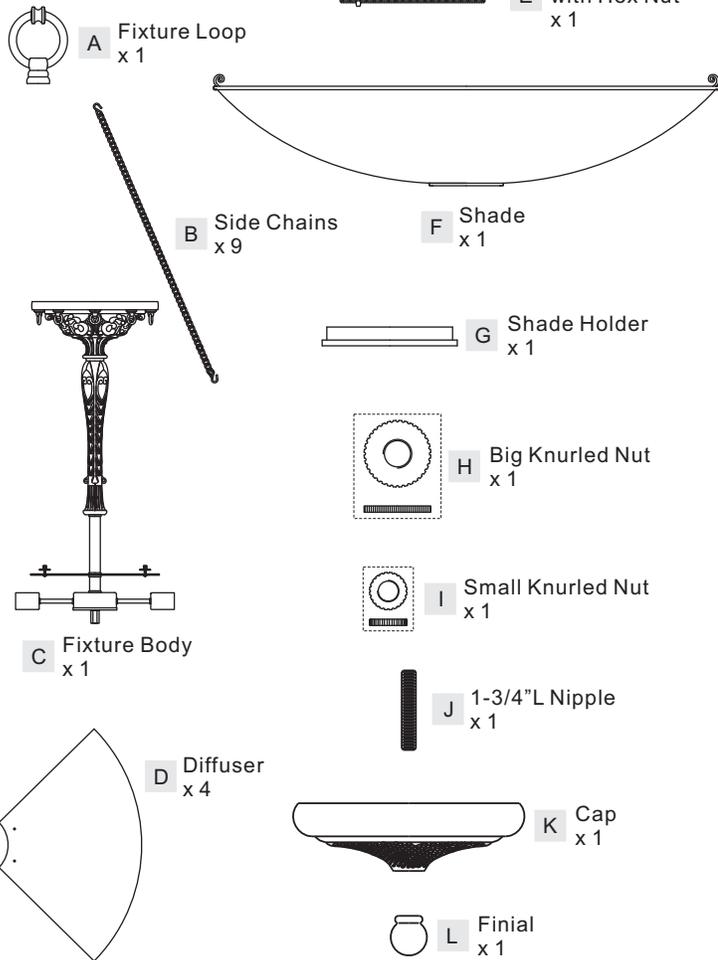


### **Hardware Contents**

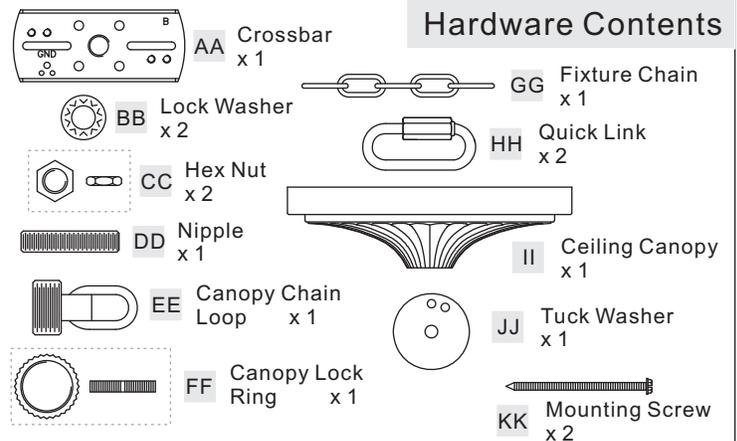

### **STEP 1 - Install Fixture Loop**

A. Thread Fixture Loop (A) onto the nipple on the top center of the Fixture Body (C). Hand tighten until snug.

Figure 1

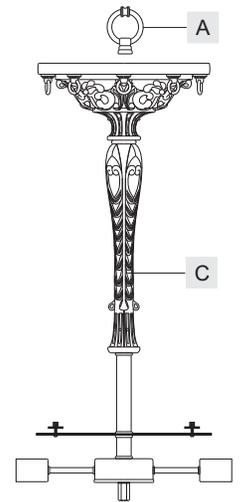

**Thank you for purchasing a Quoizel product.**  
 Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184  
 or visit us on-line at [www. quoizel. com](http://www. quoizel. com)

## STEP 2 - Install Crossbar and Ceiling Canopy

- Drill a 5/8" diameter clearance hole on the top inside center of the Outlet Box and through the Structural Support Member. Place Crossbar (AA) onto Outlet Box and line up mounting holes with a set of holes on Crossbar (AA). Thread Outlet Box Screws (not supplied) into the mounting holes on the Outlet Box and tighten until snug to secure the Crossbar (AA). By using a screwdriver, thread Mounting Screws (KK) into the Structural or Bridging Member and tighten until snug.
- Thread one Hex Nut (CC) to one end of the Nipple (DD) until it is at least 0.25" from the end. Pass one Lock Washer (BB) over the end of the Nipple (DD) and thread the Canopy Chain Loop (EE) onto the Nipple (DD). By using pliers, thread the Hex Nut (CC) against the Canopy Chain Loop (EE) and hand tighten until snug.
- Thread another Hex Nut (CC) to the middle of the Nipple (DD). Place another Lock Washer (BB) over the Nipple (DD) and then thread the Nipple (DD) into the Crossbar (AA) until the Nipple (DD) is about 0.375" above the Crossbar (AA).
- Remove the Canopy Lock Ring (FF) from the Canopy Chain Loop (EE). Place the Ceiling Canopy (II) over the Canopy Chain Loop (EE) against the ceiling to determine the correct position of the Nipple (DD). Thread the Canopy Lock Ring (FF) onto the Canopy Chain Loop (EE). Adjust the Nipple (DD) to allow the Ceiling Canopy (II) to rest against the ceiling when held in place by the Canopy Lock Ring (FF).
- Remove the Canopy Lock Ring (FF) and the Ceiling Canopy (II). Tighten the Hex Nut (CC) against the Crossbar (AA) to secure in place.

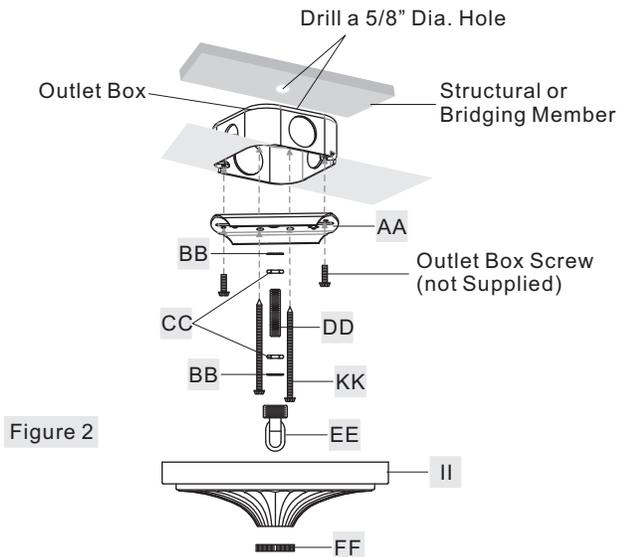


Figure 2

## STEP 3 - Install Fixture Chain, Safety Cable and Ceiling Canopy

- Adjust Fixture Chain (GG) to your desired length by removing the links if needed.
- With Fixture Chain (GG) not attached to Fixture Loop (A) and Canopy Chain Loop (EE), pull supply wires and safety cable through Fixture Chain (GG) alternating links. After wires and safety cable are through Fixture Chain (GG), pull Supply Wires, Ground Wire and safety cable through Canopy Lock Ring (FF) and Ceiling Canopy (II) in order.
- Attach one end of Fixture Chain (GG) to Fixture Loop (A) with one Quick Link (HH). Lift fixture and Fixture Chain (GG) up and attach other end of Fixture Chain (GG) onto Canopy Chain Loop (EE) with another Quick Link (HH). The fixture will now hang safely. Close chain loop at Ceiling Canopy Loop (EE).
- Feed Supply Wires, Ground Wire and Safety Cable through Canopy Chain Loop (EE) and Nipple (DD) into Outlet Box. Cut wires leaving approximately 8" of wire extending from the Outlet Box.
- Refer to Step 4 for safety cable installation.
- Refer to Step 5 for wire connections.
- Raise Ceiling Canopy (II) and Canopy Lock Ring (FF) up Fixture

## (Step 3 Continued)

Chain (GG) and over Canopy Chain Loop (EE). Tighten Canopy Lock Ring (FF) onto Canopy Chain Loop (EE) until tight.

Suggested chain length for Ceiling height :  
 9' ceiling : use 5 links of chain and 2 quick links  
 10' ceiling : use 15 links of chain and 2 quick links

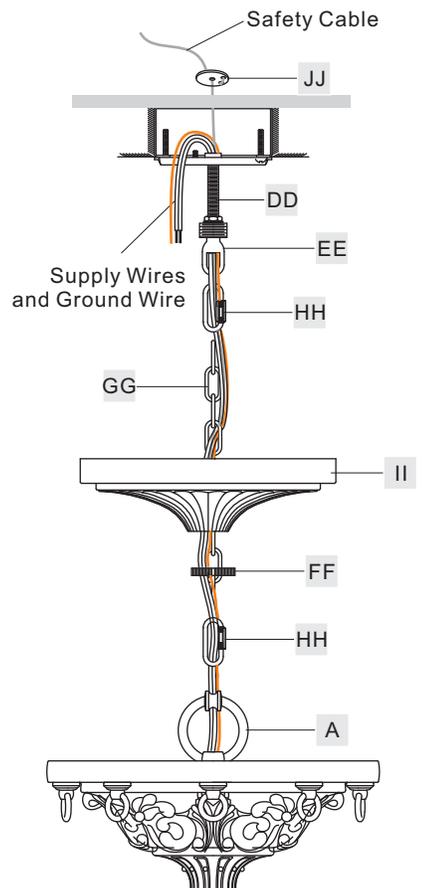


Figure 3

## STEP 4 - Install Safety Cable

- Push all slack Safety Cable through center hole of Outlet Box, Structural or Bridging Member and Tuck Washer (JJ).
- Push the Cable down through the 12 O'clock Hole. Leaving 1/2" of slack. Then push the Cable up through the 1 O'clock Hole and tuck it under the cable between the Center Hole and the 12 O'clock Hole.
- Pull all of excess cable through all of the holes until the Tuck Washer is very close to the Structural or Bridging Member. Remove as much slack as possible out of the Tuck Washer. About 1/2" of slack between Tuck Washer and the hole is acceptable.

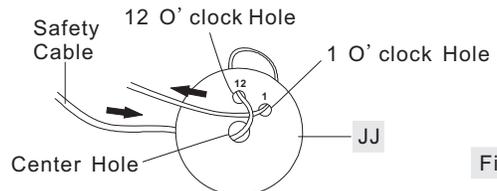


Figure 4

## STEP 5 - Making the Wire Connections


- Wrap bare or green ground wire around green ground screw on the crossbar, no less than 2 inches from the end of the wire. Tighten the green ground screw.
- Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into outlet box.

Note: If the electrical wire is going to be cut shorter than provided you will need to identify the "L" line wire and the "N" neutral wire before you cut the excess wire off. One is labeled N and the other labeled L. To do this separate the "L" line wire and the "N" neutral wire as far as you need to. Re-label the wire near where you want to

Thank you for purchasing a Quoizel product.  
 Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184  
 or visit us on-line at [www.quoise.com](http://www.quoise.com)


### (Step 5 Continued)

make the cut. Be sure to mark the wire on the side of the fixture and not on the excess wire being cut and removed.

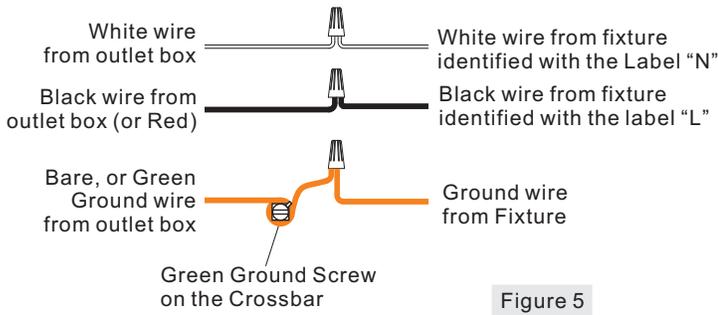

### STEP 6 – Install Nipple with Hex Nut and Diffusers


- Thread the hex nut end of the 5"L Nipple with Hex Nut (E) onto the hex coupling on the bottom center of the Fixture Body (C). By using pliers, thread the hex nut against the hex coupling and hand tighten until snug.
- Remove lock balls, flat washers and rubber washers from the bolts on the Fixture Body (C). Place Diffusers (D), rubber washers and flat washers over bolts in turn. Secure with lock balls. Hand tighten until snug.

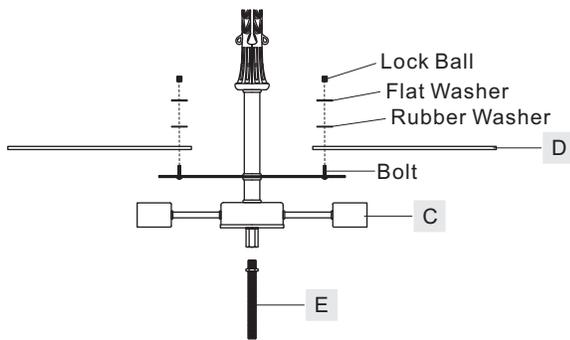

### STEP 7 – Install Shade and Cap

- Install bulbs onto sockets and screw snugly into place.
- Attach top ends of Side Chains (B) to rings on the side of the fixture canopy and Fixture Body (C). Lift the Shade (F) up and pass it over the 5"L Nipple with Hex Nut (E). Attach hangers on the top edge of the Shade (F) to bottom ends of Side Chains (B).
- Place the Shade Holder (G) onto the bottom center of the Shade (F) with the steps on the top. Secure by threading Big Knurled Nut (H) onto the 5"L Nipple (E). Hand tighten until snug.
- Thread the Small Knurled Nut (I) to the middle of the 1-3/4"L Nipple (J). Screw the 1-3/4"L Nipple (J) into the bottom end of the 5"L Nipple (E) until it is at least 3/8"L inside of the 5"L Nipple (E). Thread the Small Knurled Nut (I) against the 5"L Nipple (E) and hand tighten until snug.
- Place the Cap (K) over the end of the 1-3/4"L Nipple (J) and secure with the Finial (L). Hand tighten until snug.

Your fixture is now assembled and ready to use. Enjoy!



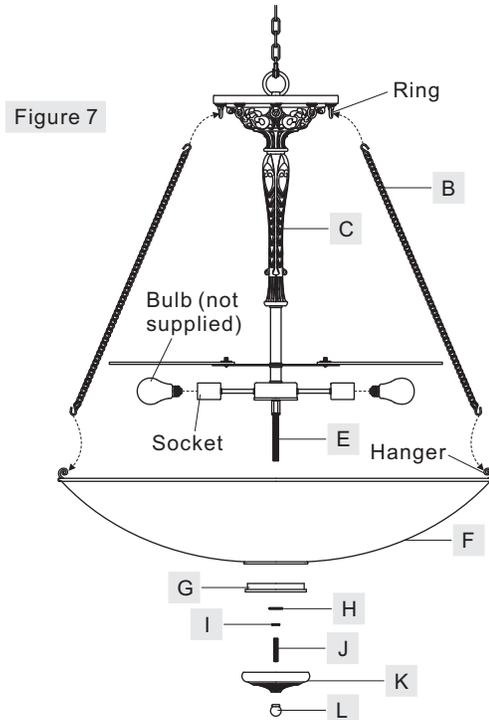


Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184  
or visit us on-line at [www.quoise.com](http://www.quoise.com)

TF1784VB

FINISH: VINTAGE BRONZE

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

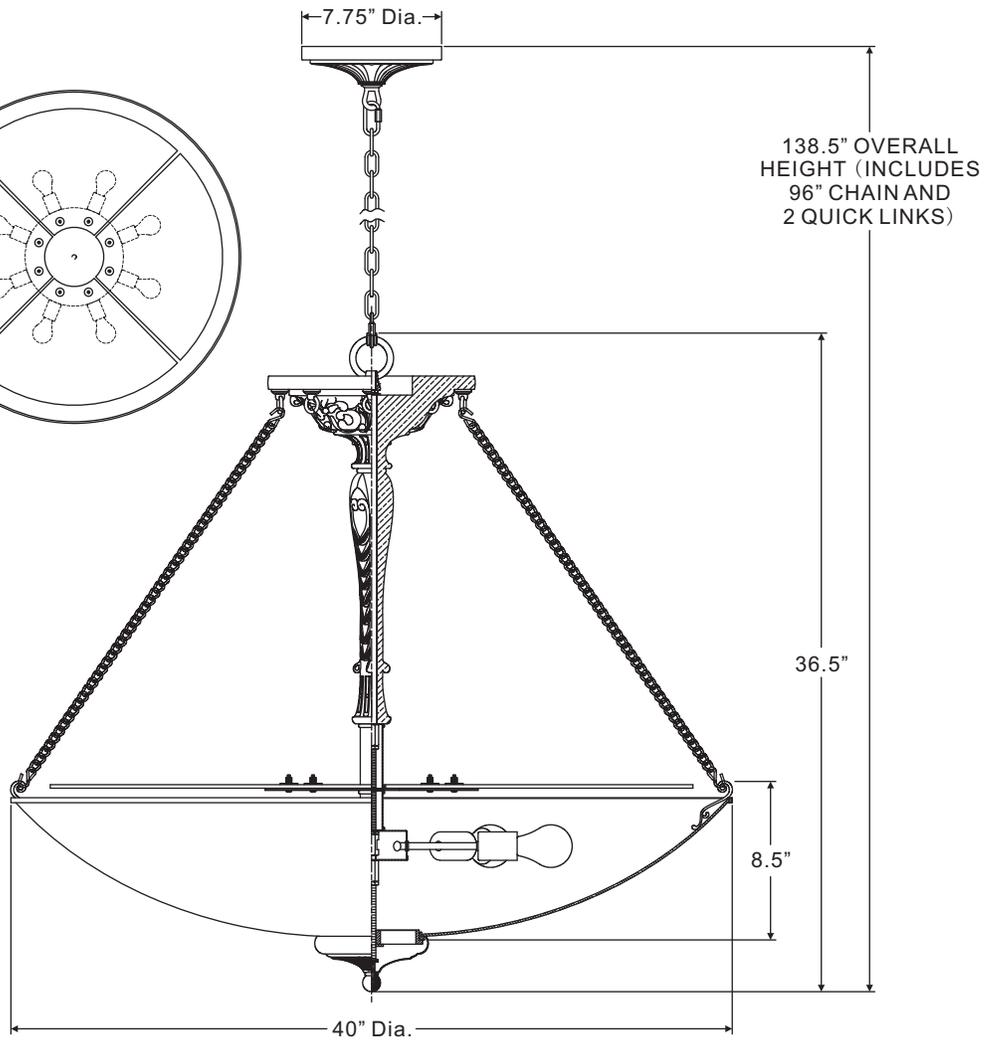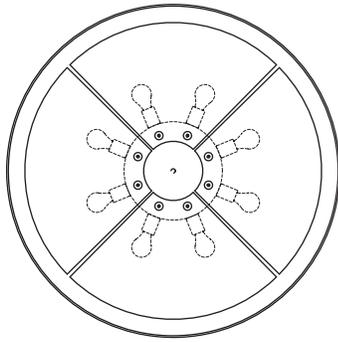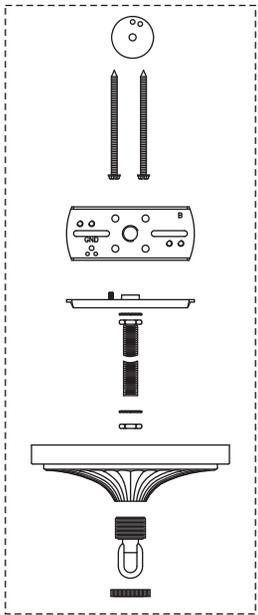

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)