


Replacement Bungee Cord Kit Instructions

Kit Contents: (2) **Short** 71.5" Cords & (2) **Long** 114" Cords


Reference Diagrams

Tip: You may need to stretch the bungee cords as you are threading them or before starting.

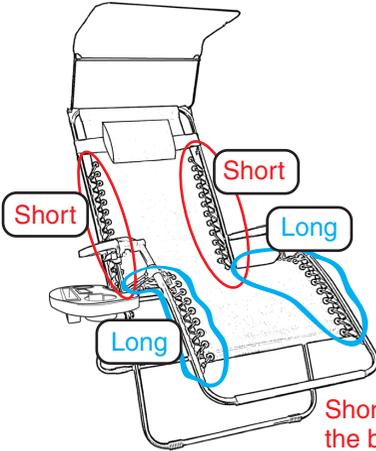


Short - 71.5" cord is to connect the back rest fabric to the frame

Long - 114" cord is to connect the seat & leg rest fabric to the frame

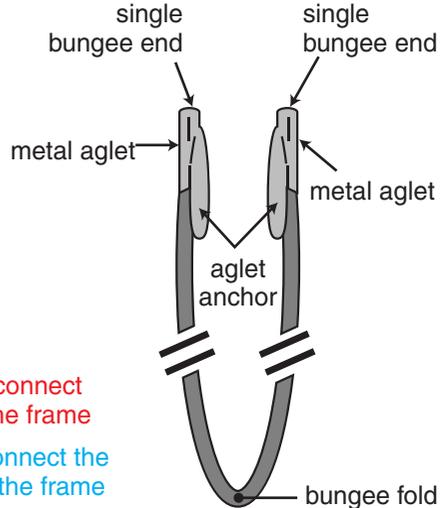

Replacing the Back Rest Bungees

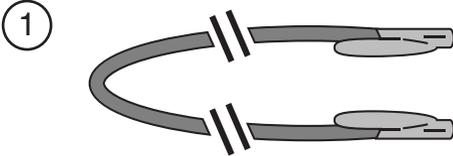

Fold the **Short** bungee in half, meeting the two single bungee ends.

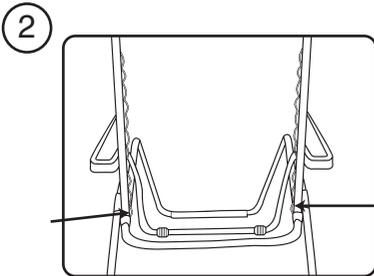


DIAGRAM A

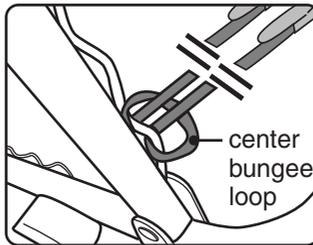


DIAGRAM B

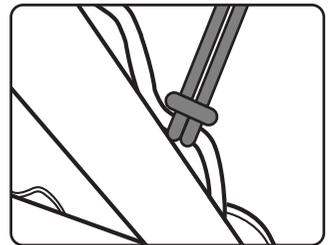


DIAGRAM C

Start with the bottom frame loop on the back rest frame (DIAGRAM A). Make a cow hitch (from the front) by threading the bungee fold through the frame loop about half way, forming a center bungee loop (DIAGRAM B). Follow the diagram until pulled taut (DIAGRAM C).

3




DIAGRAM D

Thread the bungee cord through the front of the bottom grommet ring and continue all the way up until you have reached the last grommet. Allow the aglet anchor to hook onto the top fabric metal ring (DIAGRAM D). Repeat this for both sides of the recliner's back. Anchors should be on the backside of the fabric at this point.

.....

Replacing the Seat & Leg Rest Bungees

4

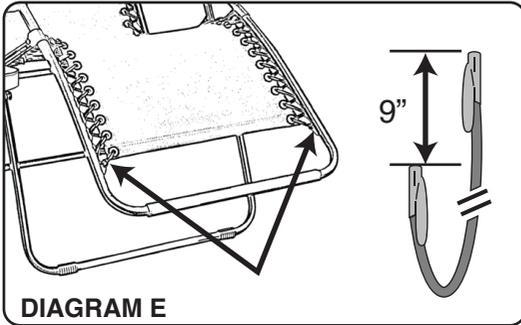


DIAGRAM E

Fold the **Long** bungee so the bungee ends are about 9" apart. Begin on the bottom frame loop (DIAGRAM E). Starting from the front of this frame loop, make a cow hitch again (see Step 2).

5




DIAGRAM F

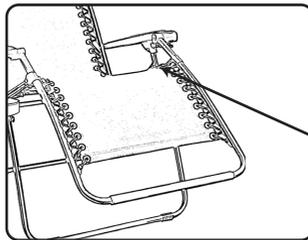


DIAGRAM G

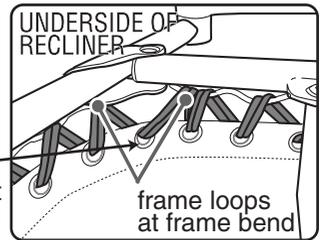


DIAGRAM H

Thread the bungee cord through the front of the bottom grommet (DIAGRAM F) then repeat until you reach the fabric bend (DIAGRAM G & H) halfway up. At this frame loop, continue like in the diagram. It is normal to have a space here to allow the fabric to bend for the knees.

6

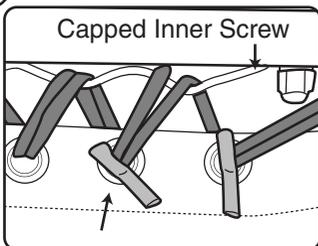


DIAGRAM I

Thread only the shorter single bungee end through the second from last fabric metal ring. Secure the single bungee end via aglet anchor (DIAGRAM I). Take the other single bungee end and thread it all the way up (through the frame loop after the capped inner screw) and through the last grommet ring and then secure the single bungee end with the aglet anchor. The anchors should both be facing the floor when complete.