dweLED

Lune

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	*Color Temp & CRI*	*Finish*	*Watt*	*LED Lumens*	*Delivered Lumens*	*Title 24*
❍ PD-16063 63"	❍ 3000K 90	❍ AL Aluminum	23W	2300	1355	YES
	❍ 3000K 90	❍ BK Black	23W	2300	1355	YES

Example: **PD-16063-AL**

DESCRIPTION

Futuristic Industrial. Segmented powerful design. Adjusts to your demands.

FEATURES

- Slim, low profile design provides diffuse illumination
- Each light bar is 300 degree adjustable to enable upward and downward illumination
- Can be mounted on a sloped ceiling
- Driver conceals within the canopy
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24: 2019
	Damp Location Listed
Construction:	Aluminum hardware with silk screen glass diffuser

FINISHES



Aluminum Black

LINE DRAWING

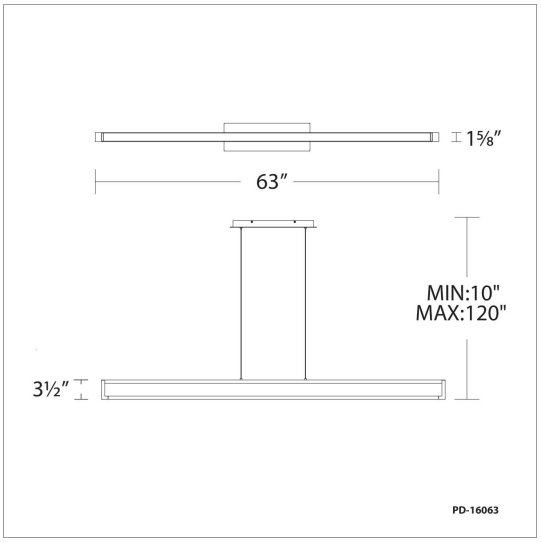

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. February 2020