
## **TUMBLING** - LED Pendant

PD-46920, PD-46925, PD-46933, PD-46954



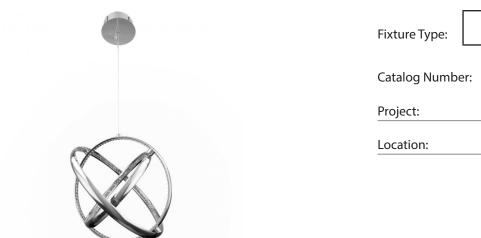

D	D	$\boldsymbol{\cap}$	П	 $\boldsymbol{c}$	ח.	EC	_	DI	PT	10	M

Symmetry in design meets the future of LED technology.

## **FEATURES**

- Crystal block ring aluminum bands
- Thin powered cables provide an ultra-clean look
- Driver concealed within the canopy
- · Can be mounted on a sloped ceiling
- Color Temperature: 3500K
- CRI: 90
- Rated Life: 50,000 hours

## **SPECIFICATIONS**

Construction: Aluminum with acrylic diffuser


**Input:** 120V - 277V

**Dimming:** 100% - 10% ELV

Light Source: High output LED

Finish: Chrome (CH)

**Standards:** ETL/cETL, Damp location listed, JA8 2016 Title 24 Compliant



## ORDER NUMBER

OND ENTITION DENT										
Model	Size	Watt	LED Lumens	Delivered Lumens	Finish					
PD-46920	20"	37W	2550	1400						
PD-46925	25"	32W	2210	1220	CH Chrome					
PD-46933	33"	50W	3450	1900	CH Chrome					
PD-46954	54"	102W	7050	3880						

Example: PD-46954-CH

**dweLED.com** Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760