




dweLE

**Fixture Type:** 

**Catalog Number:** 

**Project:** 

Location:

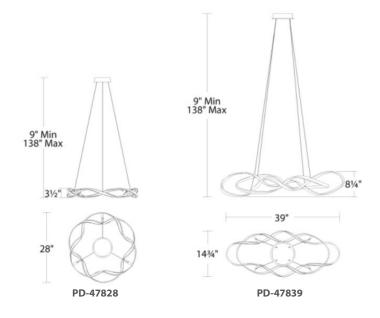

## **PRODUCT DESCRIPTION**

Delicate bands of light weave playfully in and out on this flowing modern design. A continuous construction, a flexible diffuser, and powered aircraft cable suspension complete an overall clean, seamless look.

## **FEATURES**

- Two seamless interlocked loops
- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-277V) concealed within canopy

## **SPECIFICATIONS**

Color Temp: 3000K

**CRI**: 90

Dimming: 100%-10% ELV; 100%-5% 0-10V

Rated Life: 54,000 hrs **Input:** 120V – 277V

Construction: Aluminum with composite diffuser

Finish: Chrome

Standards: ETL & cETL listed, Damp listed, Title 24

## ORDER NUMBER

Model		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
PD-47828 PD-47839	28" 39"	57W 57W	120V-277V	4853 4734	3263 3241	СН	Chrome	

Example: PD-47839-CH