

## SentinelPro™ Thermostatic/Pressure Balance Shower Package

### FEATURES:

- SentinelPro shower system includes SentinelPro concealed anti-scald thermostatic/pressure balance shower/bath valve & combinations.
- Chrome plated Brass wall plate with metal index.
- Chrome plated metal lever handle.
- Adjustable temperature limit stop (TLS). Factory set @ 110 F°.
- Brass body with integral spring check stops.
- Dual function thermostatic/pressure balance cartridge.
- Can be installed back-to-back. Includes rough-in template.
- Four port valve with ½ in. female Copper sweat and ½ in. NPT male inlets and outlets.
- Furnished with ½ in. cap.
- Chrome plated transfer valve with zinc lever and brass body
- S-2272-E2 showerhead with **Flow** control device reduces **Flow** to a maximum of 2.0 gpm (7.6 L/min).
- S-2500 shower arm and wall **Flange**.
- In-line vacuum breaker.
- VS-100-PC handshower with **Flow** control device reduces **Flow** to 2.5 gpm (9.5 L/min) maximum.
- 69 in. square lock stainless steel hose with rubber liner.
- Chrome plated Brass supply elbow with wall **Flange**.
- Swivel connector.
- Valve construction is Forged Brass Body and Brass Bonnet.
- Maximum capacity is 4.3 gpm +/- .2 @ 45 psi.
- Maximum Hot Water Supply Temperature is 185°F. Minimum Hot Water Supply Temperature is 5°F above set point.
- Maximum operating temperature is 120°F.
- Valve Temperature Set Point is 110°F (Based on 115-120°F hot & 55-65°F Cold).
- 42 in. chrome plated brass slide bar with mounting screws.
- Maximum Static Pressure is 125 psi.
- Minimum **Flow** (for +/- 3°F performance) meets ASSE 1016 to 15 gpm (5.7 L/min).



### FINISH:



PC

### COMPLIANCE:

- ASSE 1016 & ASME 112.18.1/CSA B125.1 standards (SM-5000 Combo)
- WaterSense certified (S-2272-E2 shower head)

### OPTIONS: Add suffix to model #

- VS-2272-E15 1.5 gpm hand shower & VS-156 pause/trickle adaptor  -E15
- Less showerhead  -LH
- S-2251 showerhead  -1
- S-2252 showerhead  -2
- S-2253 showerhead  -3
- S-2292 showerhead  -9
- 69 in. white vinyl hose  -VH
- Contractor packs available

### WARRANTY:

- 5 year limited


Architect/Engineer Approval Space:

SPEAKMAN  
400 ANCHOR MILL ROAD  
NEW CASTLE, DE 19720

P: 800-537-2107  
F: 800-977-2747  
W: WWW.SPEAKMAN.COM  
R: JANUARY 2018

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. All inlets and outlets are 1/2" female copper sweat and 1/2" male NPT unless otherwise specified. 3. The location of the slide bar and supply ell is optional but restricted by the 69" hose length running from the supply ell connection to the hand shower and the 6" minimum requirement between the in-line vacuum breaker and top of the hand shower (hand shower adjusted to highest position). 4. For ADA mounting locations consult ADAAG, ANSI A117.1, or state regulations.

## DIMENSIONS:

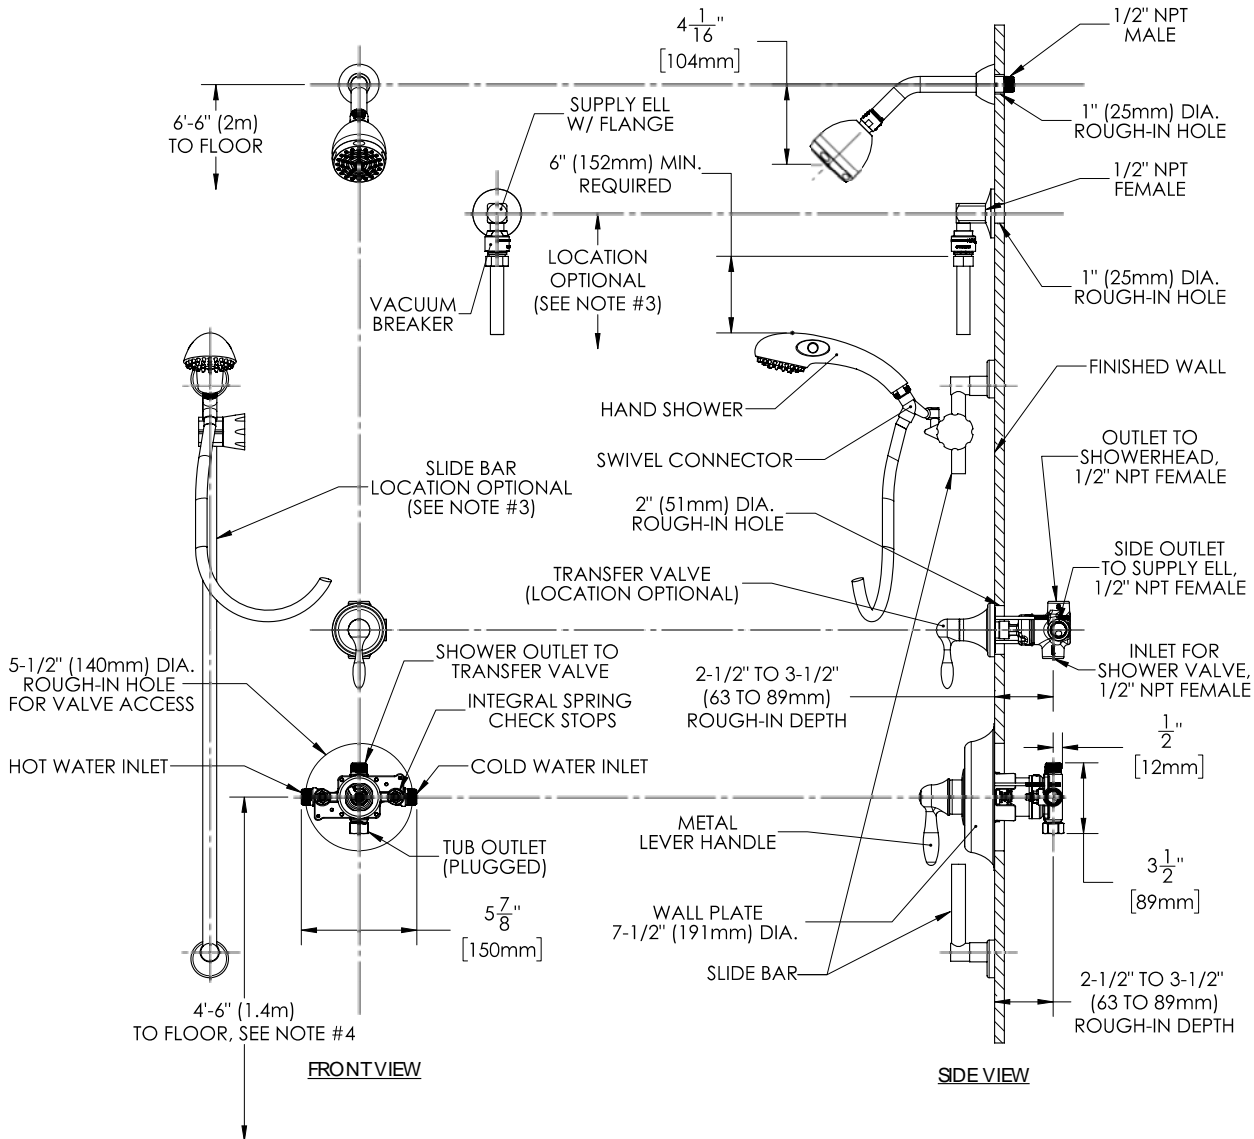

Architect/ Engineer Approval Space:

SPEAKMAN  
400 ANCHOR MILL ROAD  
NEW CASTLE, DE 19720

P: 800-537-2107  
F: 800-977-2747  
W: WWW.SPEAKMAN.COM  
R: JANUARY 2018