

**BOULEVARD SIPHONIC DUAL FLUSH RIGHT HEIGHT®  
ELONGATED ONE-PIECE TOILET WITH SEAT**

☐ **2891.200**

- Vitreous china
- **LXP (Luxury Performance) Toilet in 020 White**
- 12" (305mm) rough-in
- Right Height® Elongated siphon action dual flush bowl with smooth-sided, concealed trapway
- High efficiency, low consumption  
Full Flush (1.6 gpf/6.0 Lpf)  
Conserving Flush (1.1 gpf/4.1 Lpf),  
utilizes 21% less water
- **Meets EPA WaterSense® Criteria (Pending)**
- EverClean® Surface
- PowerWash™ rim scrubs bowl with each flush
- 16-1/2" (419mm) rim height for accessible applications
- Fully glazed 2" trapway
- Oversized 3" flush valve
- Generous 9" x 8" water surface area
- 2 color-matched bolt hole covers
- Includes Duroplast Slow Close Toilet Seat and cover with concealed seat ring and easy lift-off feature for simple removal and reattachment for cleaning
- Chrome-plated top mounted push button actuator
- 2 color-matched bolt hole covers
- 10 year warranty on entire toilet
- **Design coordinates with Studio and Boulevard lavatories**



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

**Nominal Dimensions:**

756 x 368 x 775mm  
(29-3/4" x 14-1/2" x 30-1/2")

Fixture only, supply by others


☐ **5218.110** Elongated molded seat

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures



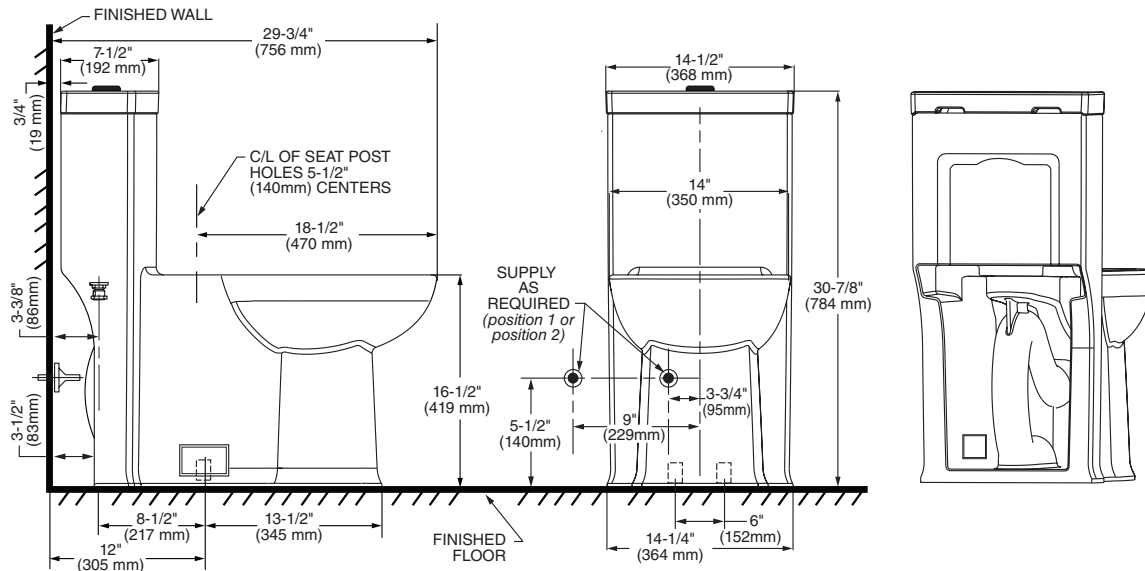

**IMPORTANT:** Water supply on the wall is required at 3-3/4" or 9" from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 3-1/4". In this case, check your supply and hose dimensions.

**NOTES:**

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.  
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.  
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.