




MODEL NUMBER:

- ❑ **2908.222.002F Widespread Lavatory**
Speed Connect® pre-assembled drain. Porcelain lever handles. Polished Chrome finish.
SKU# 383-456

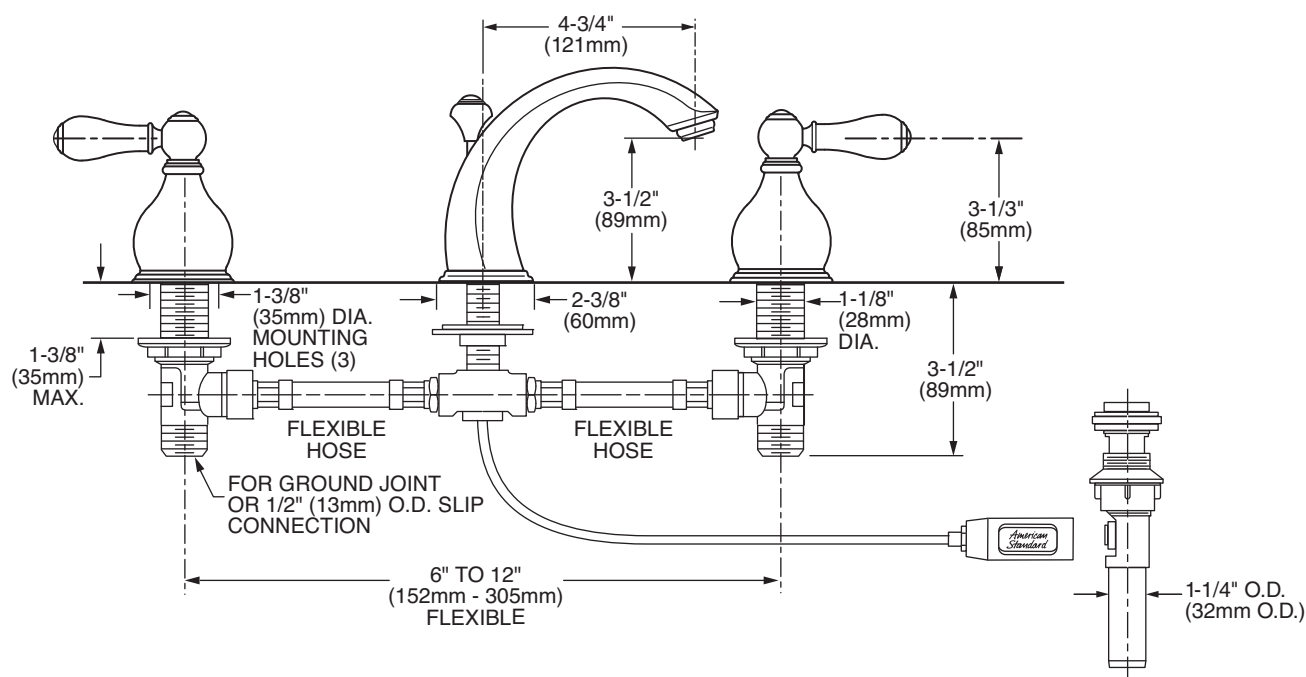

GENERAL DESCRIPTION:

Porcelain lever handles. Cast brass valve bodies with flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless ceramic disc valve cartridges. One-half inch male inlet shanks. 20 inch (500mm) long flexible stainless steel drain cable is pre-assembled to spout. Speed Connect® pre-assembled drain body with 1-1/4" (32mm) tail piece. 1.5gpm / 5.6 L/min maximum flow rate.

PRODUCT FEATURES:

Speed Connect® Drain:

- 1/3 the parts, installs in 1/3 the time.
- No tools or plumbers putty required for installation.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

Brass Construction: Durable. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Smooth handle operation and assures a lifetime of drip-free performance.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.


SUGGESTED SPECIFICATION:

Dual control widespread lavatory faucet shall feature cast brass valve bodies with flexible hose connections for 6" to 12" installations. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 2908.222.002F, SKU# 383-456.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1M
CSA B 125
NSF 61/Section 9

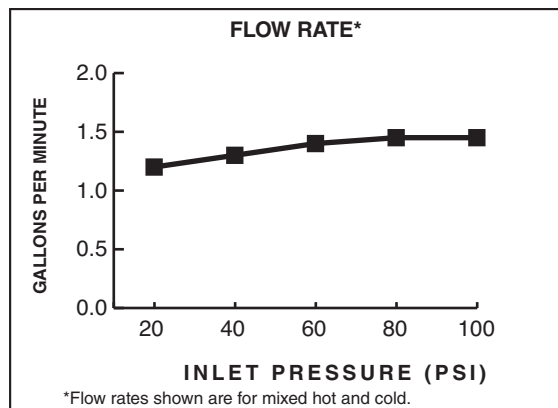

Product Number	Description
2908.222.002F	Lavatory faucet. Porcelain lever handles. Speed Connect® pre-assembled drain. Polished Chrome finish. SKU# 383-456.

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.