

**STUDIO® 5' x 36" Bathing Pool**

- Minimalist design with contoured lumbar support
- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Drop-in or under-mount installation
- Can be flush mounted with Zero-Edge™ profile model
- Integral tile flange models for alcove installation

- 2934.002-D2** 2" profile
- 2934.002-D4** 4" profile
- 2934.002-D0** Zero-Edge™ profile
- 2935.102** Integral tile flange, right hand drain
- 2935.202** Integral tile flange, left hand drain

**Nominal Dimensions:**

60" x 36" x 22-1/2"  
(1524 x 914 x 572mm)

**Compliance Certifications -  
Meets or Exceeds the Following Specifications:**

- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density



**To Be Specified - Required:**

- Color:
- Bath Filler: (specify finish)
- Bath Drain: (specify finish)
- Recommended: 1640.305 Deep Soak® drain or 1583.470 Universal drain


**To Be Specified - Optional:**

- In-Line Safe-T-Heater: 9075.120

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS  
AND PRODUCT SPECIFICATIONS

For color/finish availability and other faucet choices,  
please see [www.americanstandard.com](http://www.americanstandard.com)

**MODEL SERIES 2934**

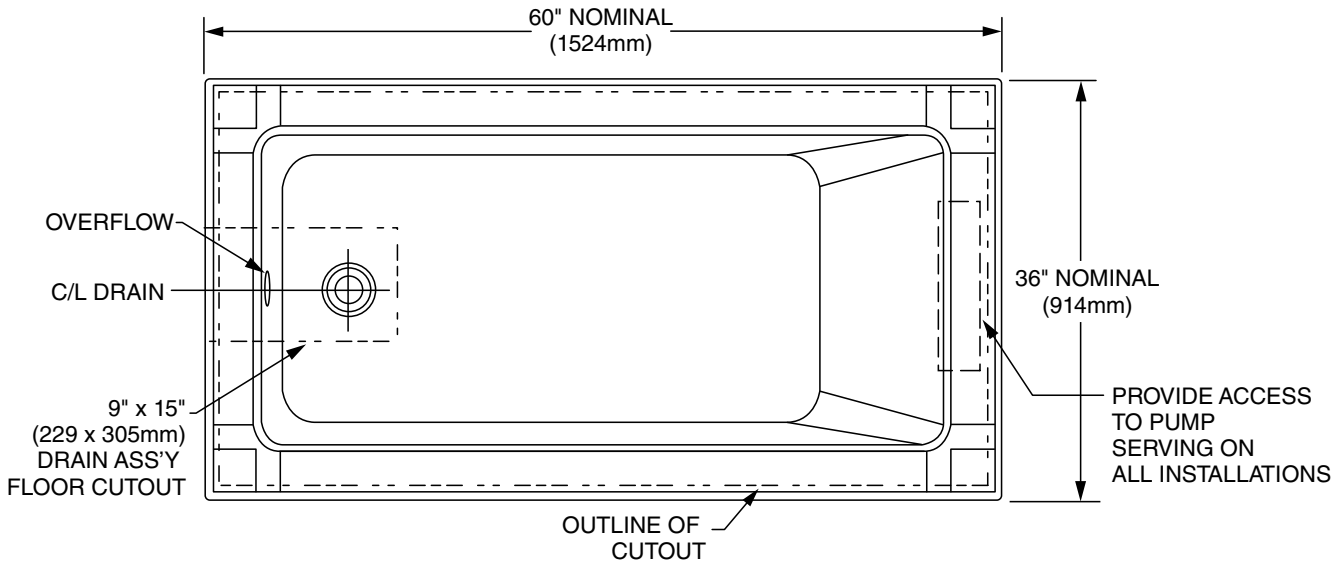

<b>GENERAL SPECIFICATIONS FOR 2934 SERIES BATHING POOL</b>	
INSTALLED SIZE	60 x 36 x 22-1/2 In. (1524 x 914 x 572mm)
WEIGHT	95 Lbs. (43 Kg.)
WEIGHT w/WATER	686 Lbs. (311 Kg.)
GAL. TO OVERFLOW	71 Gal. (269 L)
WATER DEPTH TO OVERFLOW	17-3/4 In. (451mm)
FLOOR LOADING (PROJECTED AREA)	46 Lbs./Sq.Ft. (223 Kgs./Sq.m)
PTS.	13.58
CUBE (FT <sup>3</sup> )	31.5

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.