







Location:



9601-PLR, 9601-PLR-TRM, 9601PLR, 9601PLRTRM

Shower Trim

Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> Origins Shower System or Trim Requires Temptrol® Pressure Balancing Shower Valve (included with 9601-PLR) Adjustable stop screw to limit handle turn (included with 9601-PLR) Metal lever handle 1 mode showerhead with easy to clean nozzles 2.0 gpm (7.6 L/min) flow restrictor Tub spout not included Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9601PLRTRMTC) 	<ul style="list-style-type: none"> <input type="checkbox"/> -1.2  1.2 gpm (4.5 L/min) flow restrictor <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -1.75  1.75 gpm (6.6 L/min) flow restrictor <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L7 Less handle <input type="checkbox"/> TC Test Cap Trim <input type="checkbox"/> -VP Vandal resistant escutcheon screws in place of standard screws <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> -CHKS Integral check stops <input type="checkbox"/> -B Brass escutcheon (chrome only) <input type="checkbox"/> -X Integral service stops - allows water shut-off at valve for service
Model Numbers	Compliance
<ul style="list-style-type: none"> <input type="checkbox"/> 9601-PLR Shower Trim with Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens) <input type="checkbox"/> 9601PLR Shower Trim with Temptrol Pressure Balancing Shower Valve (use when ordering L1-L7 modifications, do not use hyphens or decimal points) <input type="checkbox"/> 9601-PLR-TRM Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens) <input type="checkbox"/> 9601PLRTRM Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points) 	<ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) Buy American Act (9601-PLR only)  
<p>Note:</p> <p>-To create trim sku, follow the format: Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (if lower than standard) -> TRM -> TC (if applicable)</p> <p>-To create valve & trim sku, follow the format: Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (if lower than standard)</p> <p>-For B and REV modifications, contact customer service for your sku</p>	Warranty
Architectural/ Engineering Specification	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/ Engineering Specification


Symmons Origins _____ With Origins Shower System or Trim, requires temptrol® pressure balancing shower valve (included with 9601-PLR), adjustable stop screw to limit handle turn (included with 9601-PLR), Metal lever handle, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9601PLRTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.2 - 1.2 gpm (4.5 L/min) flow restrictor", "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stop", and "TC - Test Cap Trim".



SYMMONS® Origins[®]

9601-PLR, 9601-PLR-TRM, 9601PLR,
9601PLRTRM

Dimensions

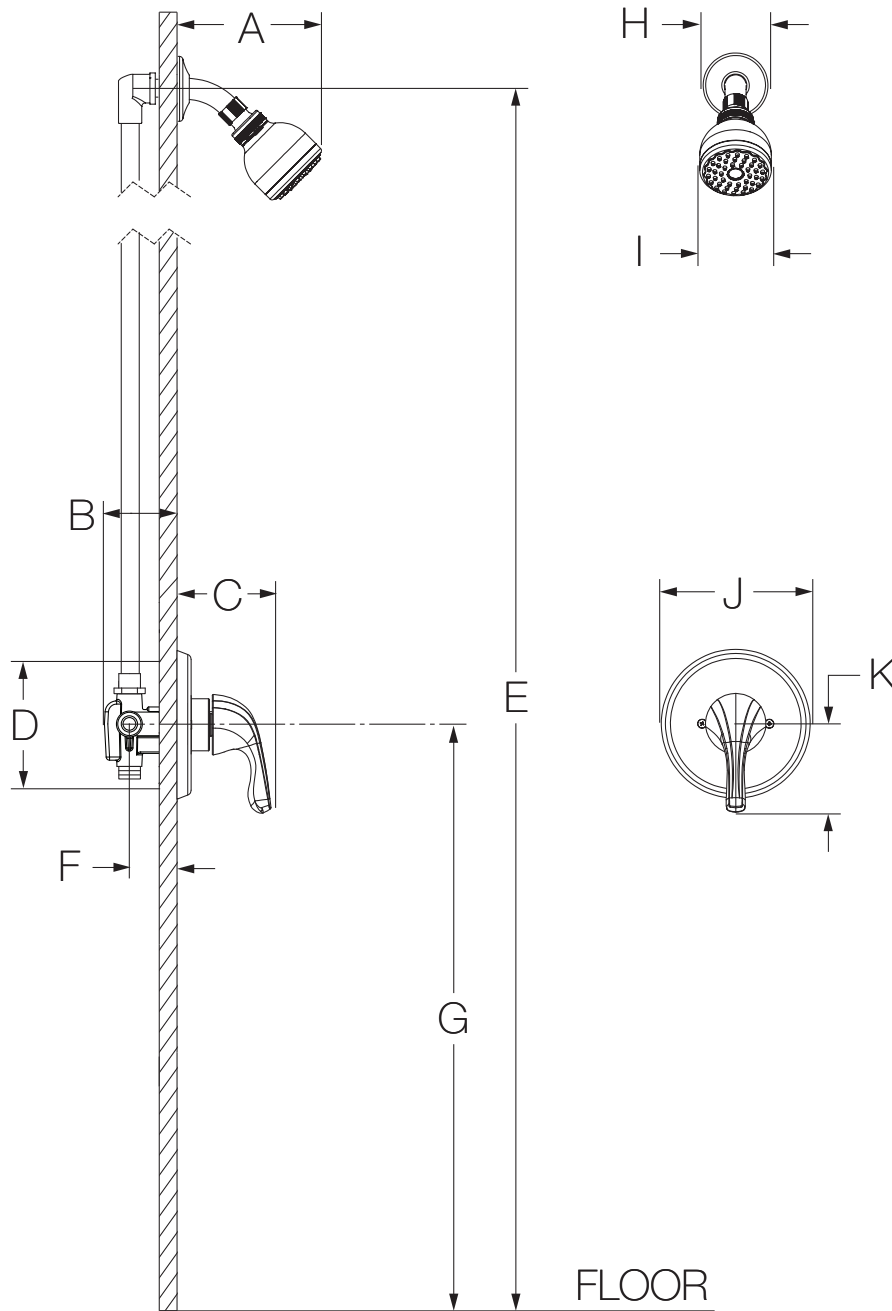

Measurements	
A	6-3/8", 162 mm
B	3-1/2", 89 mm
C	3-5/8", 92 mm
D	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
E	Ref. 77", 1956 mm
F	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
G	Ref. 42", 1067 mm
H	Ø 2-1/2", 64 mm
I	Ø 2-3/4", 70 mm
J	Ø 5-3/4", 146 mm
K	3-3/8", 86 mm