SPEAKMAN® SE-693

Combination Shower with Round Eyewash System

EYE WASH FEATURES: (SE-582)

- (2) aerated yellow plastic spray outlets
- 300 series stainless steel bowl
- ½ in. NPT female brass, chrome-plated valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 3.18 gpm @ 30 psi
- Universal emergency sign included

SHOWER FEATURES:

- 8 in. yellow plastic showerhead
- Internal 20 gpm restrictor flow control
- 1in. NPT female brass, chrome plated, full flow stay-open ball valve
- Powder coated yellow aluminum triangular pull rod activator
- 1¼ in. galvanized steel piping stanchion and fittings
- 1¼ in. NPT female inlet & waste
- DuraJade™powder-coated finish on stanchion for durability and enhanced corrosion resistance.
- 20 gpm @ 30 psi

FINISHES:

DuraJade™powder-coated galvanized steel (standard)

COMPLIANCE:

- Certified to ANSI/ ISEA Z358.1

OPTIONS:

Add suffix to model #

• Anti-freeze protection valve	❑ -FPV
• Hand & foot operation	❑ -HFO
• Hand-held spray	❑ -HS
• Self-closing shower valve with chain & ring	❑ -SCSV
• Stainless steel pull rod	❑ -SPR
• Anti-scald protection valve	❑ -SPV
• 1in. IPS stainless steel ball valve	❑ -SSBV1
• ½ in. IPS stainless steel ball valve	❑ -SSBV2
• Stainless steel showerhead	❑ -SSH

WARRANTY:

- 3 year limited

Architect/ Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS:

NOTE: 1 All dimensions are in inches (millimeters) unless otherwise speci´ ed and are subject to change without notice.

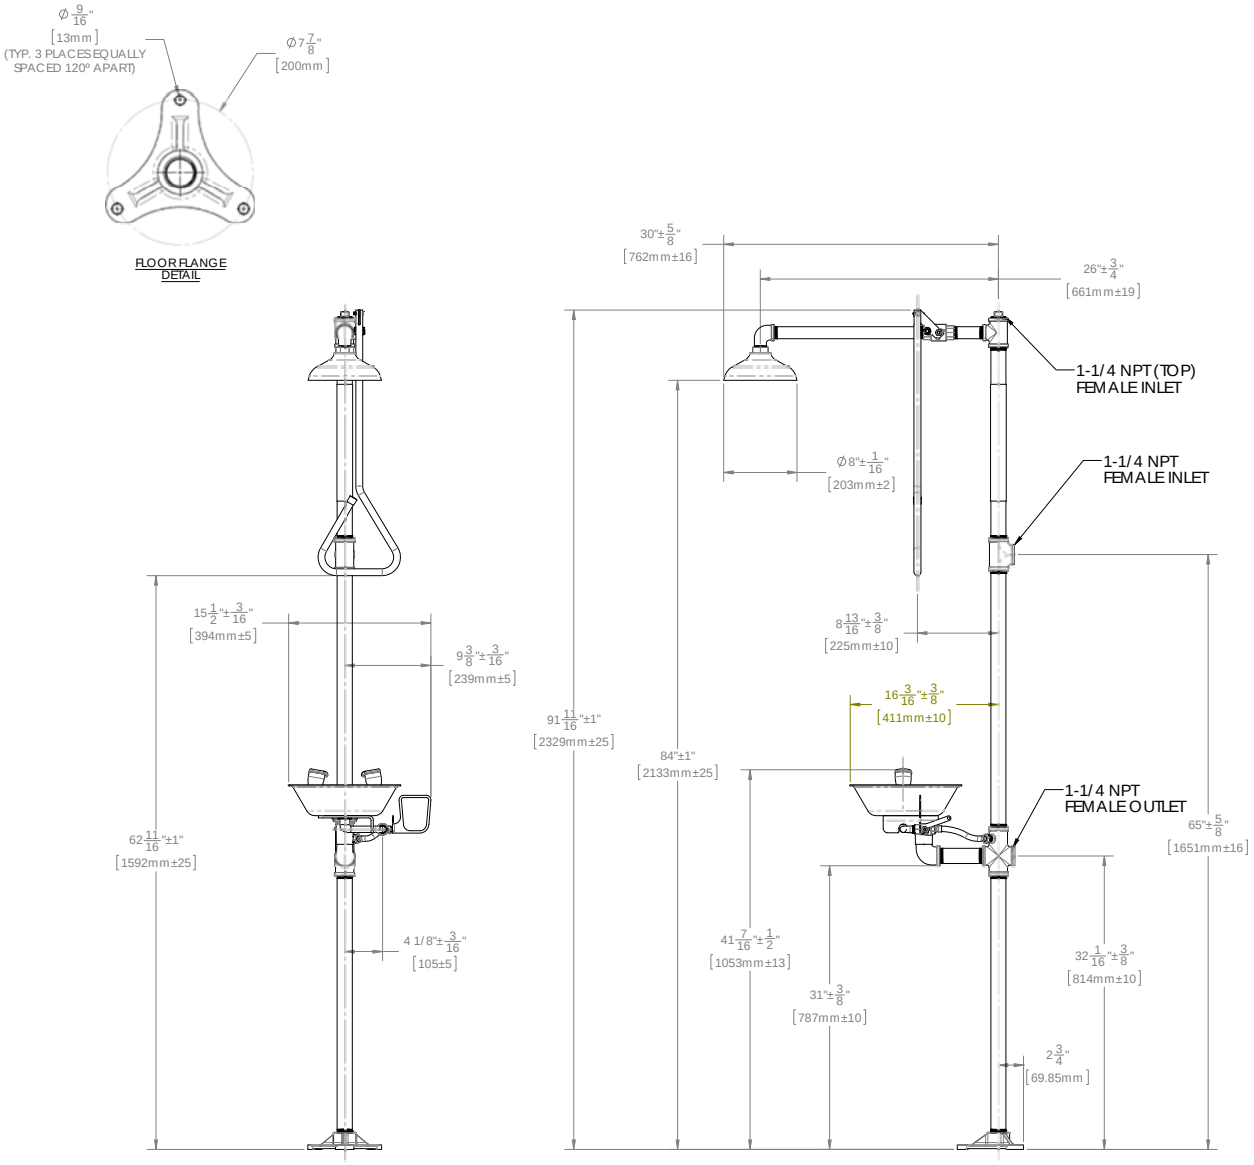

Architect/ Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017